### ZONESPOT II HIGHBAY EMERGENCY LIGHT TWT8452WM

























## Self-contained LED Emergency Light with 1 h Battery and Lumi Test Self-testing

The Zonespot II Highbay is a surface-mounted emergency light that is particularly suitable for high spaces. The luminaire's optics are designed to provide a broad, uniform light pattern that illuminates open areas effectively.

Thanks to the IP44 enclosure class, the Zonespot II is also suitable for damp areas. The luminaire is easy and quick to install thanks to a separate mounting base, which is also connected to the power supply.

The Zonespot II Highbay is a surface-mounted emergency light that is particularly suitable for high spaces. The luminaire's optics are designed to provide a broad, uniform light pattern that illuminates open areas effectively.

Thanks to the IP44 enclosure class, the Zonespot II is also suitable for damp areas. The



luminaire is easy and quick to install thanks to a separate mounting base, which is also connected to the power supply.

The Zonespot II Highbay is a surface-mounted emergency light that is particularly suitable for high spaces. The luminaire's optics are designed to provide a broad, uniform light pattern that illuminates open areas effectively.

Thanks to the IP44 enclosure class, the Zonespot II is also suitable for damp areas. The luminaire is easy and quick to install thanks to a separate mounting base, which is also connected to the power supply.

The Zonespot II Highbay is a surface-mounted emergency light that is particularly suitable for high spaces. The luminaire's optics are designed to provide a broad, uniform light pattern that illuminates open areas effectively.

Thanks to the IP44 enclosure class, the Zonespot II is also suitable for damp areas. The luminaire is easy and quick to install thanks to a separate mounting base, which is also connected to the power supply.




Product Code	TWT8452WM
Feature	Lumi Test
Mounting (standard)	surface
Mounting (optional)	pendel
GTIN Code	6438045023816
ETIM Product Class	EC001957
Length	180 mm
Width	50 mm
Height	180 mm
Weight	0.7 kg
Backup	1h
Max Input Power VA	3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	II
IP Class	IP44
Temperature Range Min - Max	0+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	plastic
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm <sup>2</sup>
Luminous Flux	225 lm

# Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table. Level of measurement 0,02 m, measurement result with battery operation.



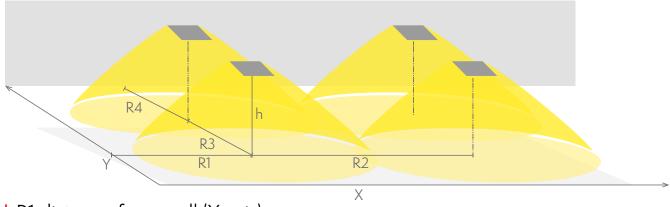

R1 distance from wall (X axis)
R2 installation distance between lights (X axis)
R3 installation distance between lights (Y axis)
R4 distance from wall (Y axis)

#### TWT8452WM

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
4	27	3	7	7	3
6	12	3	7	7	3
8	7	3	7	7	3
10	4.5	3	7.5	7.5	3
12	3	3.5	8	8	3.5
14	2	3.5	8	8	3.5
16	1.5	3.5	8	8	3.5

#### **OPTIONAL ACCESSORIES:**

# SHOCK PROTECTING COVERS FOR **EMERGENCY LIGHTS**



Product Code	Product Name	Compatible Product Groups
TW77507B	Shock protecting cover TW77507B	ESC 10 Emergency Exit Lights, ESC 80 Emergency Exit Lights

### OPTIONAL MOUNTING ACCESSORIES FOR **EMERGENCY LIGHTS**





Product Code	Product Name	Compatible Product Groups
TWT9202	Wall bracket TWT9202	Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Safe 29 Emergency Lights, Linespot II: Midbay, Surface-Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights
TW77504F	Suspension bracket TW77504F	Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Linespot II: Midbay, Surface-Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights



