## ESC 80 EMERGENCY EXIT LIGHT Y8092WM107



EN 60598-2-22		

Self-contained ESCAP Emergency Exit Light with 1 h Super Capacitor and Lumi Test Self-testing with 1-sided pictogram, arrow left, 20 m viewing distance (Invidually packed TWS8092WM)

ESC 80 is an emergency exit light equipped with a light plate, combining cutting edge technology combined with modern luminaire design. Thanks to Teknoware's innovative electronics and product design, the ESC 80 luminaire combines uniformly illuminated pictograms, low power consumption, as well as a slender appearance.

There is a selection of three different luminaire sizes. ESC 80 luminaires can be used as 1 or 2 sided, as well as recess or surface mounted.

ESC 80 is particularly easy and fast to install thanks to a separate mounting piece, into which

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-80-emergency-exit-light-y8092wm107



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com also the power supply is connected.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-80-emergency-exit-light-y8092wm107



Product Code	Y8092WM107
Feature	Escap, Lumi Test
Mounting (standard)	ceiling, wall
Mounting (optional)	recess, flag, pendel
Customs Code	94056080
GTIN Code	6438045014500
ETIM Product Class	EC001957
Length	273 mm
Width	205 mm
Height	46 mm
Weight	0,74 kg
Backup	1h
Max Input Power VA	4 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	Ш
IP Class	IP44
Temperature Range Min - Max	-25+35 °C
Viewing Distance	20 m
Light Source	LED
Body Material	plastic
Aperture for Recess Mounting	53 x 275 mm
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm <sup>2</sup>

## **OPTIONAL ACCESSORIES:**

## SHOCK PROTECTING COVERS FOR EMERGENCY LIGHTS

1-2

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-80-emergency-exit-light-y8092wm107



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com TW77507B Shock protecting cover TW77507B

ESC 10 Emergency Exit Lights, ESC 80 Emergency Exit Lights


## OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS



Product Code	Product Name	Compatible Product Groups
TWT9000	Suspension bracket TWT9000	ESC 90 Emergency Exit Lights, ESC 80 Emergency Exit Lights, ESC 81 Emergency Exit Lights
TWT9002	Flag bracket TWT9002	124010.124011
TWT8001	Recess mounting frame TWT8001	ESC 80 Emergency Exit Lights
TWT8001B	Recess mounting frame TWT8001B	ESC 80 Emergency Exit Lights

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-80-emergency-exit-light-y8092wm107



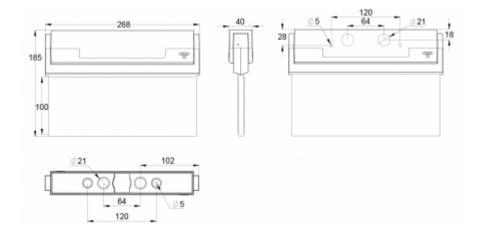

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-80-emergency-exit-light-y8092wm107



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com