
ESC 81 LED EMERGENCY EXIT LIGHT Y8192WM158





Self-contained ESCAP Emergency Exit Light with 1 h Super Capacitor and Lumi Test Self-testing with 1-sided pictogram, arrow right, 40 m viewing distance (Invidually packed TWS8192WM)

ESC 81 is an innovative LED exit light equipped with a light plate. It combines cutting edge technology with modern luminaire design.

Evenly illuminated light plates, low power consumption and slender looking luminaires are the result of Teknoware's pioneering, expertise in electronics and product design. Luminaire can be used as 1 or 2 sided, recess and surface mounted.

ESC 81 is particularly easy and fast to install thanks to a separate mounting piece, into which also the power supply is connected.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-81-led-emergency-exit-lighty8192wm158

ΕN

1838

ΕN

0598-2-2



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number F101494751 | teknoware.com | emexit@teknoware.com

Product Code	Y8192WM158	
Feature	Escap, Lumi Test	
Mounting (standard)	ceiling, wall	
Mounting (optional)	recess, flag, pendel	
Customs Code	94056080	
GTIN Code	6438045016047	
ETIM Product Class	EC001957	
Length	405 mm	
Width	40 mm	
Height	287 mm	
Weight	1,4 kg	
Backup	1h	
Max Input Power VA	4 VA	
Nominal Supply Voltage	220-240 V, 50/60 Hz AC	
Protection Class	II	
IP Class	IP44	
Temperature Range Min - Max	-25+35 °C	
Glow Wire Test of Plastic Materials	650 °C	
Viewing Distance	40 m	
Light Source	LED	
Body Material	plastic	
Aperture for Recess Mounting	53 x 415 mm	
Colour	RAL9003	
Electrical Installation	2/3 x 2,5 mm ²	

OPTIONAL ACCESSORIES:

SHOCK PROTECTING COVERS FOR

1-2

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-81-led-emergency-exit-lighty8192wm158



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

EMERGENCY LIGHTS

Product Code Product Name

Compatible Product Groups

TW77510B Shock protecting cover TW77510B ESC 10 Emergency Exit Lights, DISCONTINUED: ESC 6L Emergency Exit Lights, ESC 29 Emergency Exit Lights, Safe 29 Emergency Lights, ESC 81 Emergency Exit Lights

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS




Product Code	Product Name	Compatible Product Groups
TWT9000	Suspension bracket TWT9000	ESC 90 Emergency Exit Lights, ESC 80 Emergency Exit Lights, ESC 81 Emergency Exit Lights
TWT8101	Recess mounting frame TWT8101	ESC 81 Emergency Exit Lights
TWT8101B	Recess mounting frame TWT8101B	ESC 81 Emergency Exit Lights
TWT8102	Flag bracket TWT8102	ESC 81 Emergency Exit Lights

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-81-led-emergency-exit-lighty8192wm158



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number F101494751 | teknoware.com | emexit@teknoware.com

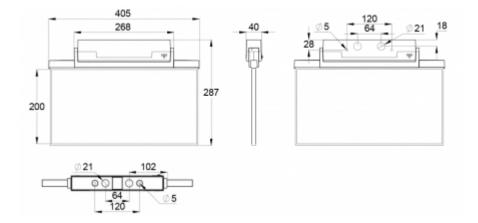

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 01, 2024 | Source: teknoware.com/en/esc-81-led-emergency-exit-lighty8192wm158



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com